
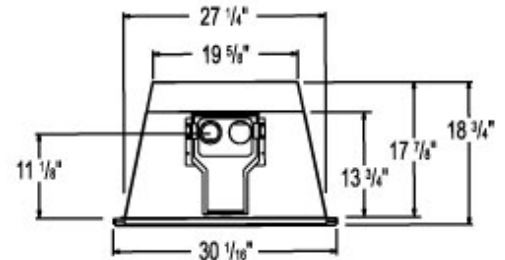



GDI30 Direct Vent Fireplace Insert

| Features | Manual

Specifications	GDI 30
Fuel	Natural Gas Propane
BTU Input - Natural Gas	24,500
BTU Input - Propane	24,500
BTU Output - Natural Gas	21,000
BTU Output - Propane	21,000
Maximum Heating Efficiency (AFUE)	
Natural Gas	85%
Propane	85%
Maximum Heating Efficiency (AFUE)	
Natural Gas	82%
Propane	82%
Minimum Fireplace Opening	28" w x 21 3/4" h x 18" d

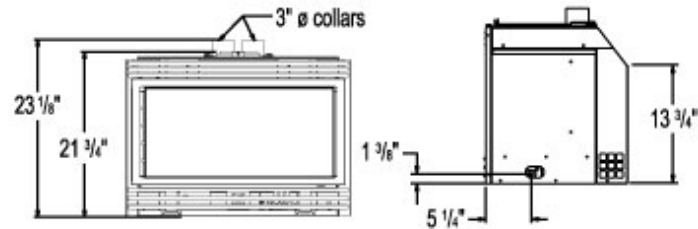

Measuring for your insert

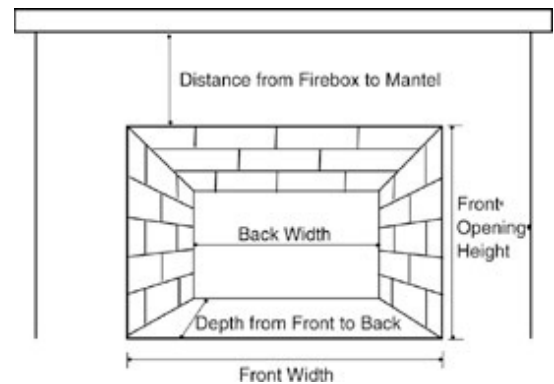

Additional Information

- 2" & 3" or 3" & 3" direct venting
- Vents up to 35' vertically
- Approved for bathrooms, bedrooms, bed-sitting rooms and suitable for mobile homes

TESTED AS A HEATER TO ANSI Z21.88 and CSA 2.33

Line dimensions are to be used as a guide only. Please consult your installation manual for updated and precise measurements before proceeding to install or frame your Napoleon Fireplaces. Check all Local and National Building Codes and Gas Regulations

