

GDI44 Direct Vent Fireplace Insert

| Features | Manual



Specifications	GDI44
Fuel	Natural Gas Propane
BTU Input - Natural Gas	40,000
BTU Input - Propane	40,000
BTU Output - Natural Gas	27,600
BTU Output - Propane	27,600
Maximum Heating Efficiency (Steady state)	
Natural Gas	69%
Propane	69%
Minimum fireplace opening	32"W x 21"H x 16"D

Additional Information

- Approved for bedrooms, bathrooms and bed-sitting rooms
- 2" and 3" direct venting
- Vents vertically up to 35'
- Three sided and four sided trim available with numerous options and designer finishes to suit your taste and decor.

CERTIFIED TO THE DIRECT VENT GAS FIREPLACE STANDARD IN CANADA AND THE UNITED STATES:

ANSI Z21.88 and CSA 2.33

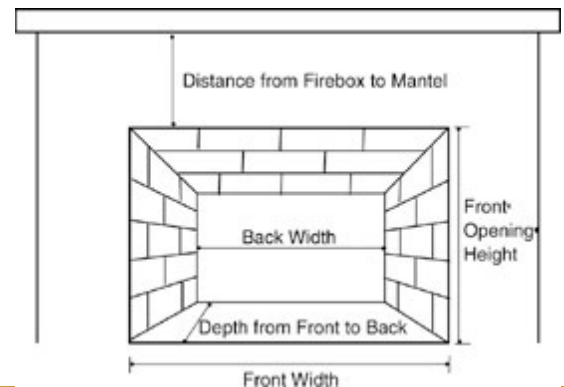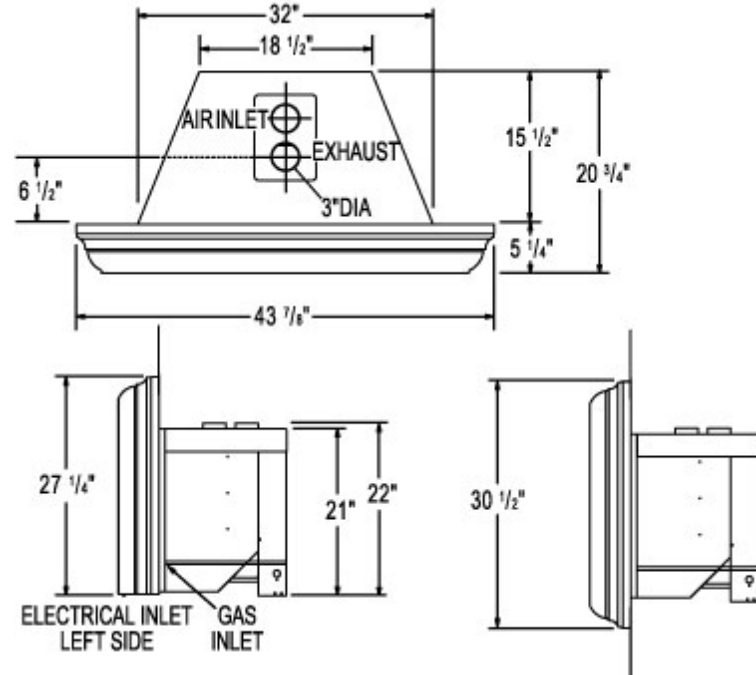

Line dimensions are to be used as a guide only. Please consult your installation manual for updated and precise measurements before proceeding to install or frame your Napoleon Fireplaces. Check all Local and National Building Codes and Gas Regulations

