

GI3600 Gas Fireplace Insert



[Features](#) | [Manual](#)

Specifications	GI3016
Fuel	Natural Gas Propane
BTU Input	
Natural Gas	24,000
Propane	22,000
Minimum fireplace opening	25.5"W x 17.5"H x 16.5"D


Additional information

- Easily installs into a wood burning, masonry fireplace; a wood burning, zero clearance prefabricated fireplace
- Specially designed to fit smaller wood burning fireplaces
- Detachable rear draft/dilution hood for easy installation in tight quarters
- Model GI3600 is also approved with 3" aluminum liner to allow for cost efficient installations without removing existing fireplace damper
- Approved for use with millivolt automatic thermostat
- Approved for bedroom installations
- No hearth required
- Approved with 3" and 4" aluminum liner

Tested to ANSI Z21.50 and CSA 2.22

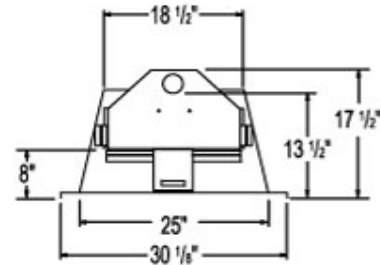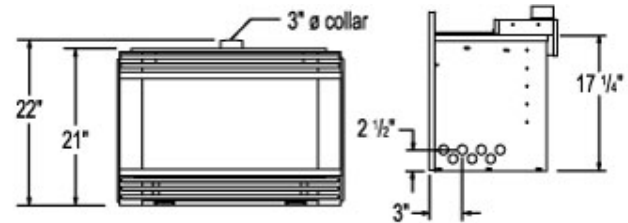

Measuring for an Insert

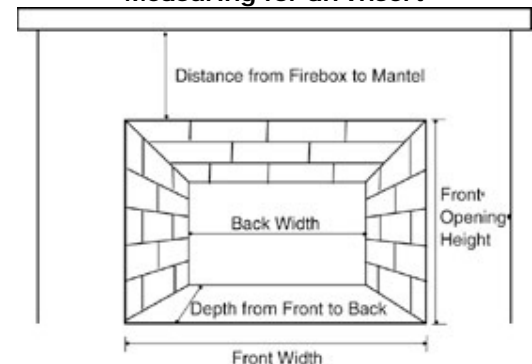

Line dimensions are to be used as a guide only. Please consult your installation manual for updated and precise measurements before proceeding to install or frame your Napoleon Fireplaces. Check all Local and National Building Codes and Gas Regulations

