


Gas Log Set

Features | Manual

Specifications	Gas Log Set
Fuel	Natural Gas Propane
18" Log Set	
BTU's - Natural Gas	55,000
BTU's - Propane	55,000
24" Log Set	
BTU's - Natural Gas	60,000
BTU's - Propane	60,000
30" Log Set	
BTU's - Natural Gas	65,000
BTU's - Propane	65,000

MINIMUM DAMPER OPENING (square inches)						
Chimney Height (In Feet)	Masonry Fireplace			Factory Built Fireplace		
	GL18	GL24	GL30	GL18	GL24	GL30
6	45.5"	49.2"	53"			
8	42.1"	45.5"	49"			
10	38.5"	41.7"	45"	32"	35.3"	39.8"
15	35"	37.7"	40.5"	23.8"	26.4"	29.3"
20	31.5"	34.3"	37"	20.1"	22.1"	24.3"
25				17"	18.1"	20.5"
30	29"	31.2"	33.5"	15.9"	17.3"	18.9"
35				14.5"	15.9"	17.4"
40				13.9"	15.2"	16.7"

Deciding which log set will fit your fireplace

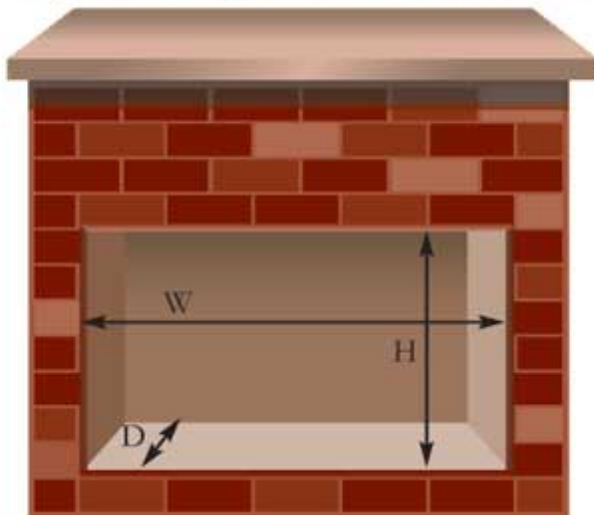

Additional Information

- Vented gas log set
- Suitable for installation into a solid fuel burning appliance
- 50% turn down rate for maximum efficiency

Certified in Canada and the US to CGA 2.26 & ANSI Z21.60 decorative appliance for installation in solid fuel burning appliances

Minimum Fireplace Size

Each gas log set must be installed into a fireplace cavity with a minimum size. Refer to the table below to determine the appropriate minimum fireplace size.

Log Set	Height	Width		Depth
		Front	Back	
18" GL18	17"	24"	24"	14"
24" GL24	17"	28"	24"	14"
30" GL30	17"	32"	24"	14"

Please consult your installation manual for updated and precise measurements before proceeding to install your Napoleon Gas Log Set. Check all Local and National Building Codes and Gas Regulations

